


# PRODUCT DATA SHEET

BACKLIT TEXTILE 180 GSM  
LENGTH : 50M

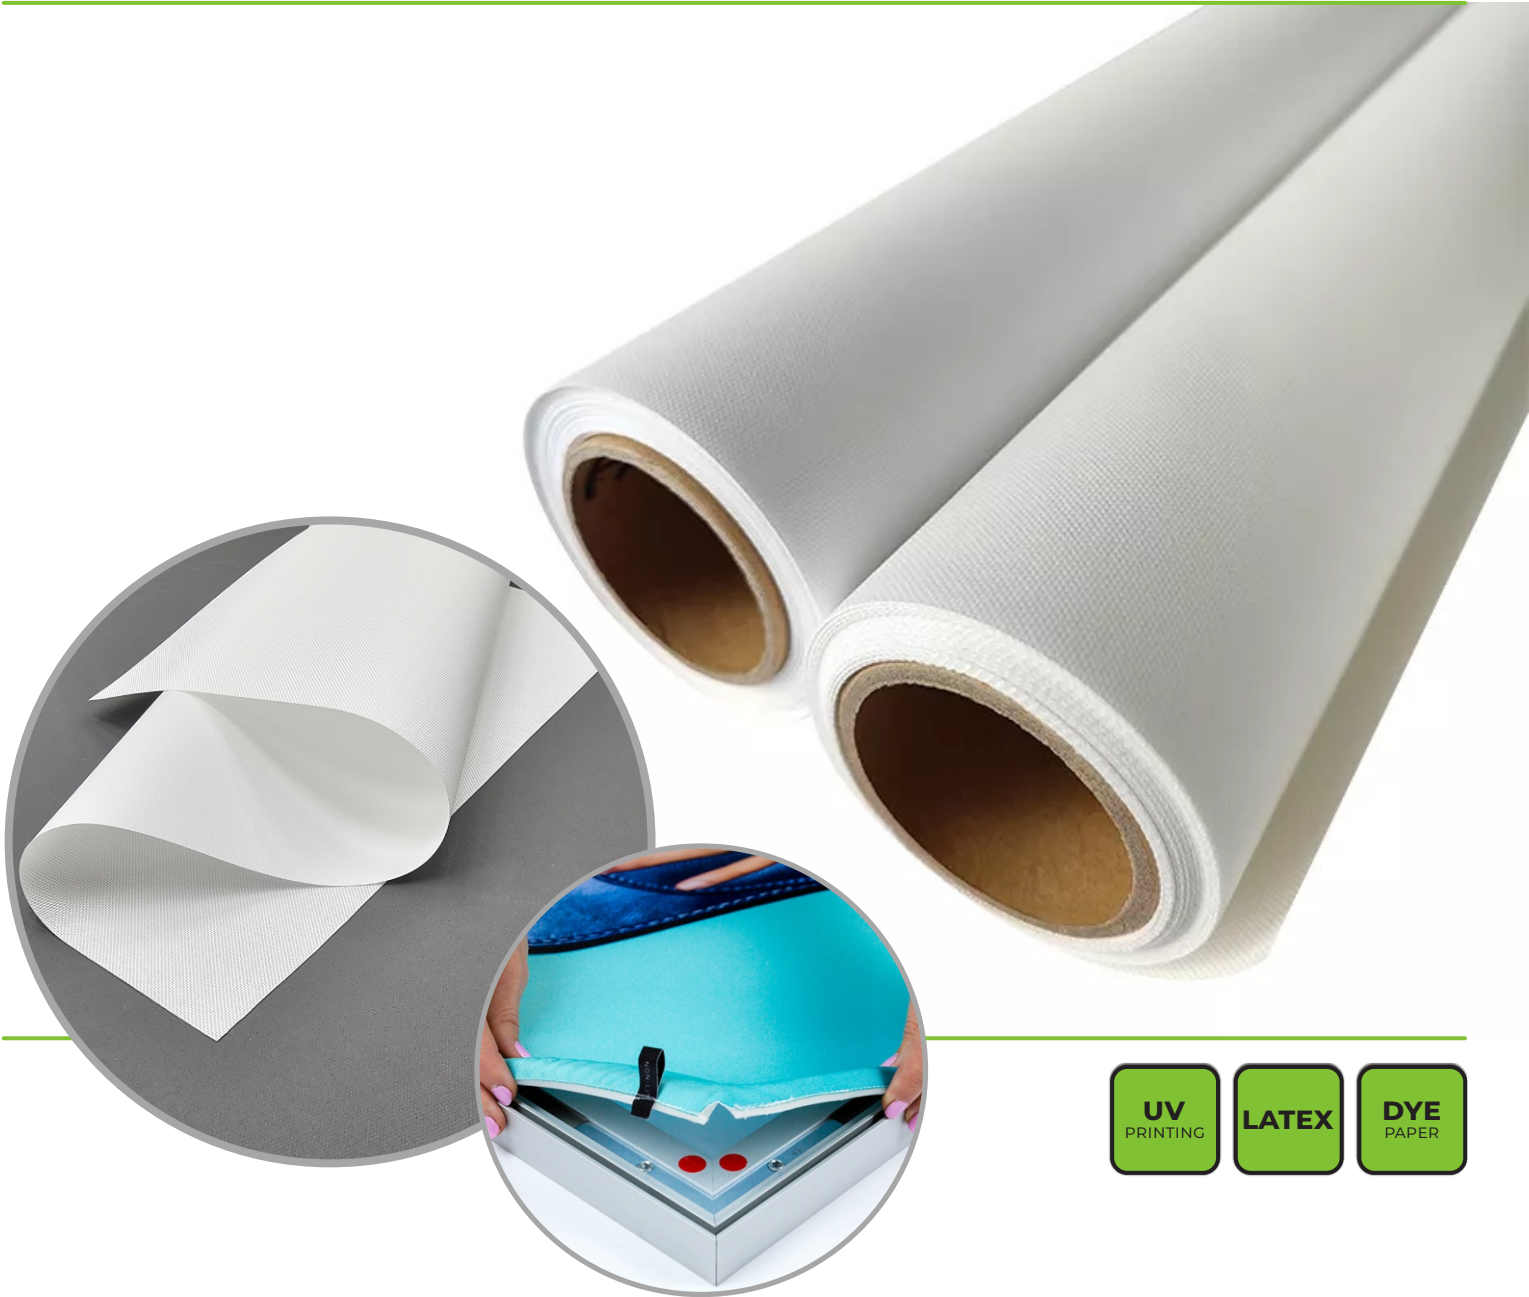

**UV**  
PRINTING

**LATEX**

**DYE**  
PAPER

## FEATURES

- PVC FREE.
- PHTHALATE FREE.
- TIGHT STRUCTURE.

## APPLICATIONS

- Backdrops, Pop-up Frame, Exhibition, Display Systems

## INK PRINTABILITY

- UV.
- LATEX.
- DYE PAPER.

## TECHNICAL PARAMETERS

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
TOTAL WEIGHT	DIN EN ISO 2286-2, ASTM D751	180G/SQ.M	5.1 OZ/SQ.YD
BASE FABRIC	DIN 60001, ASTM D7641	100 % POLYESTER	
WEAVE METHOD	N/A	WOVEN	
SHRINKAGE	(210°C, 30S)	≤ 3%	
LIGHT TRANSMITTANCE	ANSI PH2.19, ISO 5/2	(45±5)%	
WIDTH AVAILABLE	DIN EN ISO 3759,ASTM D751-2006	MAX 320CM	126"
STANDARD LENGTH	DIN EN ISO 3759,ASTM D751-2006	50M	55 YDS

NOTE : IT IS NORMAL THAT THE WEIGHT OF MOST PRODUCT WILL HAVE AN AVERAGE FLUCTUATION OF 5%. ALL ABOVE INFORMATION SHALL ONLY USED AS A GUIDE ; BUYERS SHALL INDEPENDENTLY TEST AND DETERMINE THE PRODUCT SUITABILITY. THE MENTIONED DATA ARE AVERAGE OF TEST RESULT AND SHOULD NOT BE USED FOR THE PURPOSE OF LAWSUIT OR WARRANTY.